


ITEM	SIZE	STEEL GRADE
A	203x203x46 kg/m H-COLUMN	S355JR
B	150x65x20x3.0mm CFLC SIDE RAILS	300W

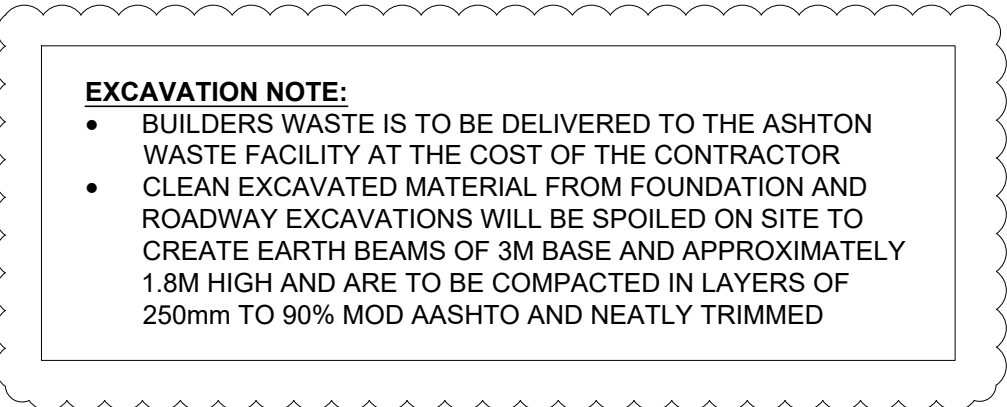

BEAM NO.	SIZE	TYPE (U/S OR D/S)
BM01	280x340mm	D/S
BM02	280x340mm	D/S
BM03	230x340mm	D/S
BM04	230x340mm	D/S
BM05	230x340mm	D/S
BM06	230x340mm	D/S
BM07	280x510mm	D/S
BM08	280x425mm	D/S
BM09	280x425mm	D/S
BM10	280x340mm	D/S

- PRE-CAST SLAB NOTE:**
- PRE-CAST SLAB TO BE DESIGNED AND SUPPLIED BY SPECIALIST, HOLLOW CORE OR SIMILAR APPROVED
 - PRE-CAST FLOOR TO BE SUPPORTED BY THE BRICK WALLS AND RC BEAMS, AS PER ENGINEERS SPECIFICATIONS
 - TO BE SUBMITTED FOR APPROVAL, MINIMUM 2 WEEKS LEAD TIME.
 - SANS 10400 FORM 3 TO BE SUPPLIED BY SPECIALIST

REINFORCEMENT NOTE:

- REFER TO DRAWING PS2006_21-000-GENERAL NOTES AND SPECIFICATIONS FOR THE STEEL QUANTITIES

